



AERAMAX AERATOR

YOUR MULTI-PURPOSE SOIL CARE TOOL



WHAT IS THE AERAMAX?

With a variety of available configurations, the AeraMax aerator is a truly multi-purpose tool. Blending soil aeration with residue management, the AeraMax can be used to promote soil health and the regrowth of pastures.

Designed and manufactured in Australia, this heavy-duty aerator, with its unique suspension system, is your go-to product for pasture rejuvenation, soil aeration, residue management and moisture conservation.

KEY ADVANTAGES:

1. SOIL AERATION

The AeraMax provides the perfect answer for soil aeration, with heavy-duty cast rotating tines that penetrate the soil and crack the subsoil surface. This allows the decomposition to speed up, providing healthy soil with microbial activity.

2. HARD PAN PENETRATION

The AeraMax tines penetrate the soil surface 200mm deep, breaking up the hard pan with ease.

3. MOISTURE RETENTION

After a pass with the AeraMax, soil is left loosened. This minimises rain run off and erosion, helping you save every drop of rain.

4. PASTURE RENOVATION

The unique combination of aeraion tines and extra tools, enables you to renovate the soil without destroying additional pastures.

5. FINISHING ROLLER

A removable finishing roller that is fitted with hard boron steel blades leaves a level finish and enhances residue breakdown.

KEY FEATURES:

- » Aerator and coulter gangs are angle adjustable up to 10 degrees, allowing varying rates of soil disturbance.
- » All aerator, coulter and roller gangs are mounted on rubber suspension to limit wear and tear in rocky and uneven soils, providing a smooth ride for equipment.
- » Heavy-duty pins and bushing
- » Colour-coded hydraulics
- » Non-greasing bearings
- » 9mm SHS and RHS
- » Fully versatile system, allowing aerator, coulter and knife rollers to be changed out in the rear two tool bar locations.
- » Option to fit seed box with scatter plates

ENGINEERED TO
MAKE YOUR JOB EASIER



AERAMAX SPECIFICATIONS	52T64
Working width (mm)	6400
Transport width (mm)	3000
Minimum Weight* (kg)	7400
Penetration depth (mm)	200
Tractor minimum horsepower (hp)	200
Tyres	425R6522.5 super singles
Coulter size	20" wavy
Warranty	1 year

* Product weight will vary depending on configuration and options.


Easy tilt adjustment



Narrow transport width



Heavy duty transport wheels and axles

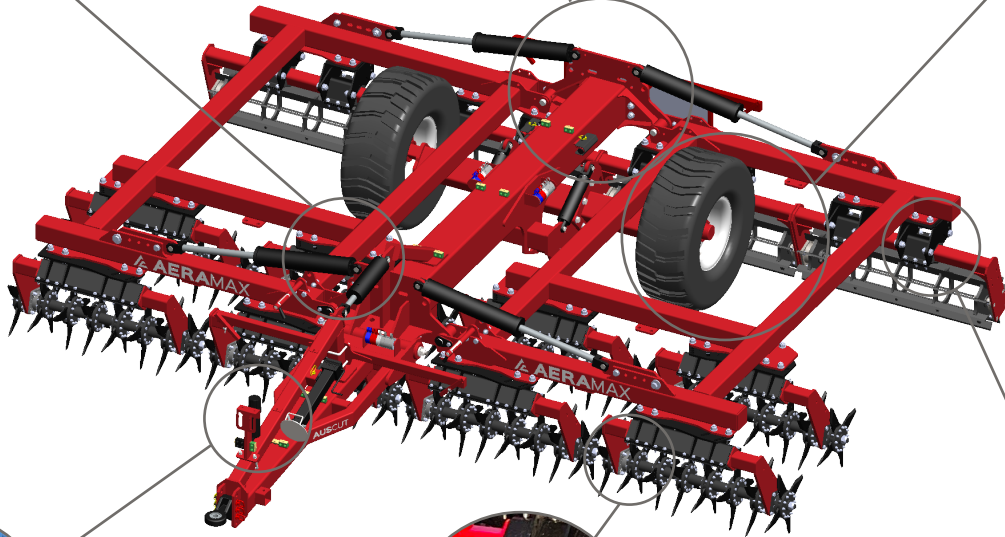


Colour-coded hydraulic couplings



Heavy duty multi-sealed bearings



Simple depth adjustment

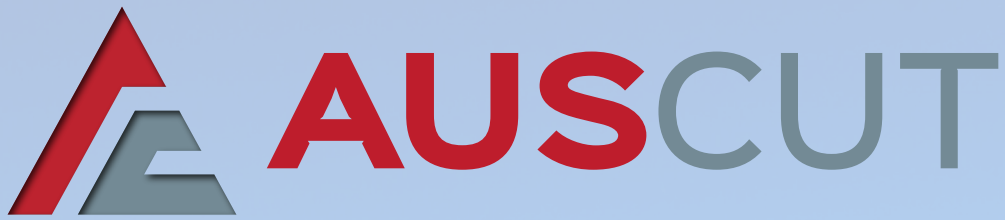

*Built by Australian farmers,
for Australian farmers*



19 Nangar St, Cowra
NSW 2794 Australia



P: 02 6341 3383
TOLL FREE: 1800 517 417



www.auscutglobal.com.au



hello@auscutglobal.com.au

