



TURBOTOPPER

CREATING EFFICIENCIES IN
BROADACRE RESIDUE MANAGEMENT



**MADE IN AUSTRALIA
FOR AUSTRALIAN CONDITIONS**

AUSCUT

- Forward folding design
- Fully welded & powdercoated for heavy duty construction
- Heavy duty disk rotors with uplift blades for ultimate cut
- Adjustable rear flaps for control of trash flow
- Wheels on the front for easy depth control
- Mulching blades available for fine stubble mulching




**ENGINEERED TO
MAKE YOUR JOB EASIER**



TURBOTOPPER SPECIFICATIONS	68D30	68T30	68D36	68T36	68T90	68T12
Cut width (mm)	3100	3100	3500	3500	9000	12 200
Transport width (mm)	3400	3400	3700	3700	3490	3490
Deck thickness (mm)	5	5	5	5	5	5
Weight (kg)	1500	2000	1600	2100	8000	10 000
Cut height (mm)	35 - 300	35 - 300	35 - 300	35 - 300	50 - 350	50 - 350
Rotor diameter (mm)	1615	1615	1815	1815	1615	1615
Tractor minimum horsepower (hp)	100	85	120	100	250	250
Tractor PTO speed (RPM)	540	540	540	540	1000	1000
Blade speed (fpm)	17 200	17 200	19 500	19 500	16 600	16 600
Spindle gearboxes (hp)	2 x 165	2 x 165	2 x 200	2 x 200	6 x 165	8 x 165
Warranty	1yr Deck Warranty / 3yr Gearbox Warranty					



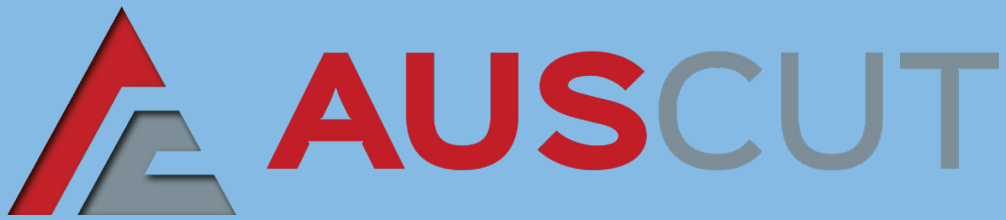

19 Nangar St, Cowra
NSW 2794 Australia



P: 02 6341 3383
TOLL FREE: 1800 517 417



www.auscutglobal.com.au



hello@auscutglobal.com.au

